

**VALVOLA A GLOBO – COPERCHIO BULLONATO – VITE ESTERNA –
ASTA SALIENTE – BRONZO – NI/AL BRONZE – ANSI 150**

**GLOBE VALVE - BOLTED BONNET - OUTSIDE SCREW & YOKE -
RISING STEM – BRONZE – NI/AL BRONZE – ANSI 150**

CONFORM TO: TEST API 598/ MSS SP 61 / BS EN 12288
BS 5154/ANSI B16.24
ANSI B16.24 BS 1873
LENGTH ANSI B16.10 (except 1/2"-3/4" mnf. std.)


OPTIONAL TRIM MATERIALS :

- 1) ASTM A182 F316 (INOX)
- 2) MONEL K500

OPTIONAL FEATURES:

- 1) LOCKING DEVICE
- 2) POSITION INDICATOR
- 3) GEAR MANUAL OPERATOR
- 4) MOUNTING PLATE DIN/ISO 5211

**WORKING
PRESSURES**
W.O.G. NON SHOCK
350 p.s.i.

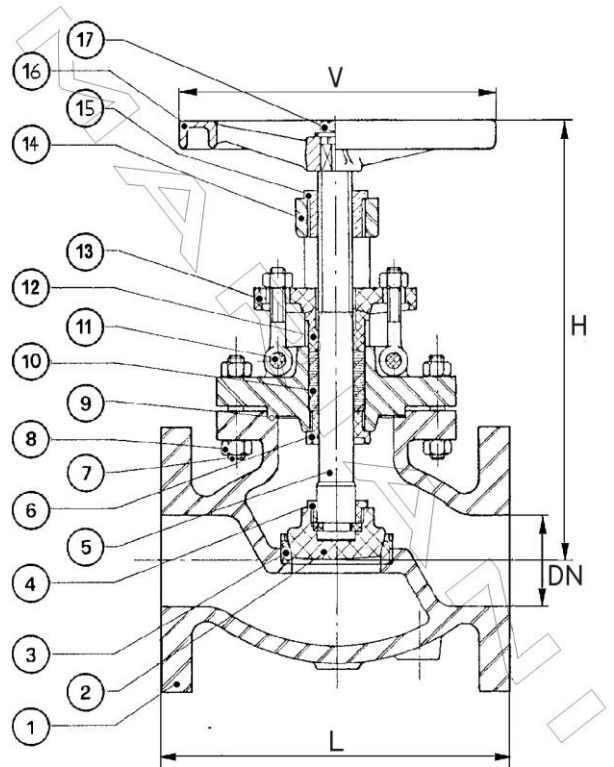

	DESCRIZIONE	DESCRIPTION	BZ (Bronze)	AL/BZ (Aluminium/Bronze)
1	CORPO	BODY	BRONZE ASTM B62 C83600	ASTM B148 C95800
2	OTTURATORE	DISC	BRONZE ASTM B62 C83600	ASTM B148 C95800
3	SEDE	SEAT	BRONZE ASTM B62 C83600	ASTM B148 C95800
4	FERMA ASTA	DISC NUT	BRONZE ASTM B62 C83600	ASTM B148 C95800
5	ASTA	STEM	BRONZE ASTM B62 C83600	ASTM B150 C63000
6	CONTROTENUTA	BACK SEAT	BRONZE ASTM B62 C83600	ASTM B148 C95800
7	TIRANTI CORPO	BOLT	ASTM A193 B7 ZINC PL.	ASTM A193 B8 M
8	DADO	NUT	ASTM A194 2H ZINC PL.	ASTM A194 Gr. 8 M
9	GUARNIZIONE	GASKET	GRAPHITE TEFLONED	GRAPHITE TEFLONED
10	BADERNA	STEM PACKING	GRAFOIL	GRAFOIL
11	TIRANTI PREMISTOPPA	EYE BOLT	ASTM A193 B7 ZINC PL.	ASTM A193 B8 M
12	PREMISTOPPA	THRUST WASHER	BRONZE ASTM B62 C83600	BRONZE ASTM B62 C83600
13	FLANGETTA	FLANGE	BRONZE ASTM B62 C83600	ASTM B148 C95800
14	CAVALLOTTO	YOKE	BRONZE ASTM B62 C83600	ASTM B148 C95800
15	BOCCOLA	YOKE SLEEVE	BRONZE ASTM B62 C83600	ASTM B148 C95800
16	VOLANTINO	HANDWHEEL	CARBON STEEL	CARBON STEEL
17	DADO	NUT	ASTM A194 2H ZINC PL.	ASTM A194 Gr. 8 M

FLANGED ENDS: ANSI B16.5 (ANSI B16.24 THICKNESS) 150 FF/RF or DIN 2501 PN 10-16

SIZE	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"
DN	15	20	25	40	50	65	80	100	125	150	200	250	300	350	400
L	139	139	127	165	203	216	241	292	356	406	495	622	698	787	914
H (OPEN)	205	205	225	330	350	415	435	500	558	620	700	750	1100	1150	1740
V	100	100	100	175	200	250	250	300	400	400	490	575	575	575	800
Kg	4	5	6	16	21	33	40	51	73	99	176	272	380	550*	750*

* Gear operator