


**VALVOLA A GLOBO – COPERCHIO BULLONATO – VITE ESTERNA –
ASTA SALIENTE – ACCIAIO C./INOX – ANSI 300**

**GLOBE VALVE – BOLTED BONNET – OUTSIDE SCREW & YOKE –
RISING STEM – CARBON/STAINLESS ST. – ANSI 300**

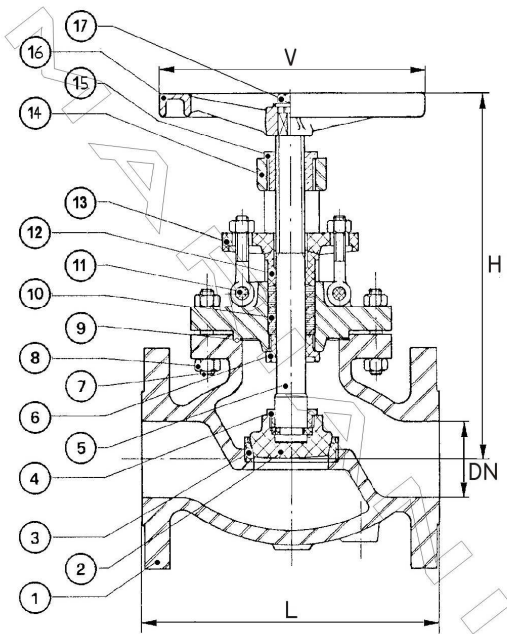

WORKING PRESSURES
W.O.G. NON SHOCK
700 p.s.i.

**CONFORM TO: TEST API 598 / MSS SP 61 / BS 6755
ANSI B16.5 / BS 1560 3.1 / ANSI B16.34 /
BS 1414 / LENGTH ANSI B16.10**

OPTIONAL FEATURES:

- 1) RENEWABLE SEAT
- 2) LOCKING DEVICE
- 3) MOUNTING PLATE DIN ISO 5211
- 4) GEAR MANUAL OPERATOR
- 5) POSITION INDICATOR

**OPTIONAL BODY MATERIAL: 10) ASTM A352 LCB
11) ASTM A217 C5**

**OPTIONAL TRIM MATERIAL: 12) MONEL K500
13) FULL STELLITE**

	DESCRIZIONE	DESCRIPTION	A (Carbon Steel)	INOX (Stainless Steel)
1	CORPO	BODY	ASTM A216WCB	ASTM A351 CF8M
2	OTTURATORE	DISC	ASTM A182 F6 A	ASTM A182 F316
3	SEDE	SEAT	ASTM A182 F6 A + Gr. 6	ASTM A182 F316
4	FERMA ASTA	DISC NUT	ASTM A182 F6 A + Gr. 6	ASTM A182 F6 A
5	ASTA	STEM	ASTM A182 F6 A + Gr. 6	ASTM A182 F316
6	CONTROTENUTA	BACK SEAT	ASTM A182 F6 A + Gr. 6	ASTM A182 F316
7	TIRANTI CORPO	BOLT	ASTM A193 B7	ASTM A193 B8
8	DADO	NUT	ASTM A194 2H	ASTM A 194 Gr. 8
9	GUARNIZIONE	GASKET	GRAPHITE TEFLONED	GRAPHITE TEFLONED
10	BADERNA	STEM PACKING	GRAFOIL	GRAFOIL
11	TIRANTI PREMISTOPPA	EYE BOLT	AST MA193 B7	ASTM A193 B8
12	PREMISTOPPA	THRUST WASHER	ASTM A182 F6 A	ASTM A182 F316
13	FLANGETTA	FLANGE	ASTM A216 WCB	ASTM A351 CF8M
14	CAVALLOTTO	YOKE	AST MA216 WCB	ASTM A351 CF8M
15	BOCCOLA	YOKE SLEEVE	ASTM B148 9A	ASTM B148 9A
16	VOLANTINO	HANDWHEEL	CARBON STEEL	CARBON STEEL
17	DADO	NUT	ASTM A 194 2H	ASTM A 194 Gr. 8

**FLANGED ENDS: ANSI-ASME B16.5 – 300 RF
SOLDER ENDS: BW (ANSI B16.25)**

SIZE	2"	2"1/2	3"	4"	6"	8"	10"	12"	14"	16"
DN	50	65	80	100	150	200	250	300	350	400
L	267	292	318	356	445	559	622	711	838	863
H(open)	280	250	400	460	620	710	790	880	1190	1400
V	225	350	250	350	450	500	600	650	750	850
Kg	23	31	46	68	145	223	320	440	605	830