


## RUBINETTO A MASCHIO C/PREMISTOPPA BULLONATO – 3 VIE – GHISA/ACCIAIO C./INOX -PN 16


## PLUG VALVE BOLTED GLAND – 3 WAYS – CAST IRON/CARBON/STAINLESS ST.- 100 LBS

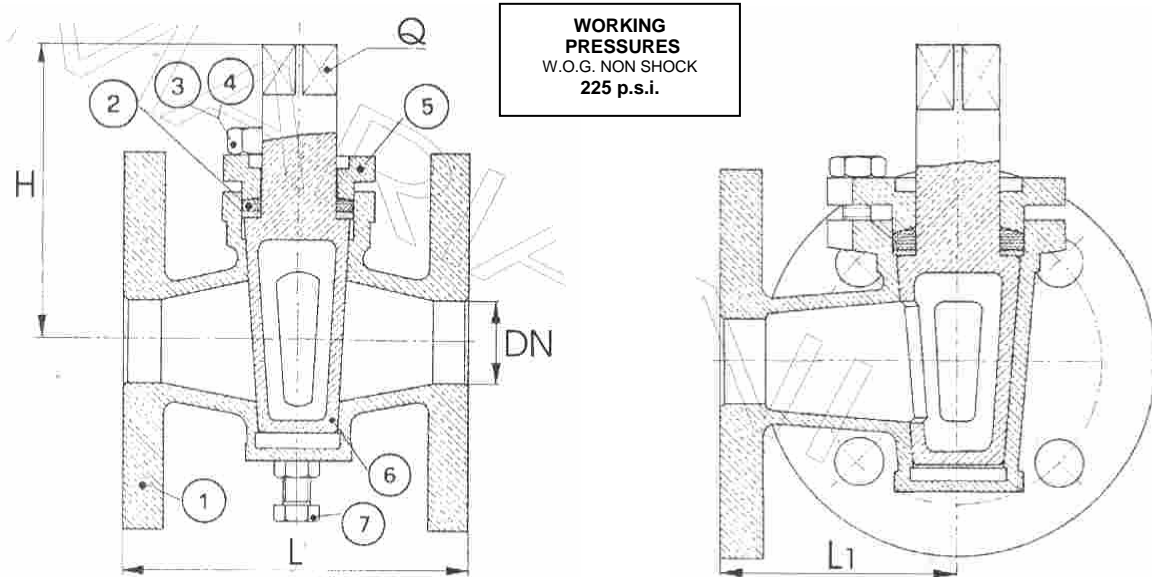

OPTIONAL FEATURES: 1) CAST IRON LEVER

OPTIONAL MATERIALS: BODY/TRIM

- 10) ASTM A 351 CF 3 M (AISI 316L)
- 11) ASTM A 494 Gr. CW (HASTELLOY C)
- 12) ASTM A 494 Gr. M 35 (MONEL)
- 13) ASTM A 351 Gr. CN 7 M (ALLOY 20)

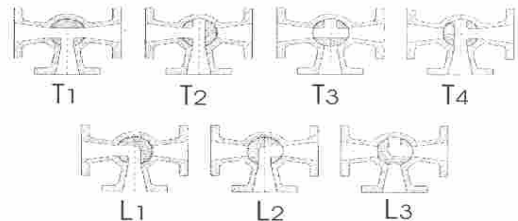

### #CAST IRON ASTM A126 B=UNI 5007-69 (GG25)

	DESCRIZIONE	DESCRIPTION	GH (Cast Iron)	GH/BZ (C.I./Bronze)	A (Carbon Steel)	INOX (StainlessSteel)
1	CORPO	BODY	ASTM A126 B#	ASTM A126 B	ASTM A216 WCB	ASTM A351 CF8M
2	BADERNA	STEM PACKING	GRAPHITE TEFLON.	GRAPHITE TEFLON.	GRAPHITE TEFLON.	GRAPHITE TEFLON.
3	DADO	NUT	ASTM A194 2H	ASTM A194 2H	ASTM A194 2H	ASTM A194 GR.8
4	PRIGIONIERO	BOLTING	ASTM A193 B7	ASTM A193 B7	ASTM A193 B7	ASTM A193 B8
5	PREMISTOPPA	THRUST WASHER	ASTM A126 B	ASTM A126 B	ASTM A216 WCB	ASTM A351 CF8M
6	MASCHIO	PLUG	ASTM A126 B	BRONZE B62	ASTM A351 CF8M	ASTM A351 CF8M
7	SPINGIMASCHIO	BOTTOM SCREW	ASTM A193 B7	ASTM A193 B7	ASTM A193 B7	ASTM A193 B8

### FLANGED ENDS: DIN 2501 PN 6-10-16 / ANSI-ASME 150 FF – 150 RF

	SIZE	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"
GH	DN	25	32	40	50	65	80	100	125	150	200
	L	150	180	190	205	240	260	320	355	400	500
	L1	75	90	95	102	120	130	160	177	200	250
	H	120	125	145	145	180	190	230	300	330	385
	Q	22	22	27	27	32	36	52	62	66	62
	Kg	6	9	11.500	15	21	26	39	67	90	136
A/INOX	L	155	180	180	203	240	260	315	350	400	500
	L1	80	95	115	115	125	125	153	175	200	250
	H	120	130	148	168	180	190	255	280	345	385
	Q	19	24	26	30	34	39	52	52	62	62
	Kg	5.900	11.300	11.800	15.400	24	29	39	64	92	146