


VALVOLA A GALLEGGIANTE A DOPPIA SEDE EQUILIBRATA - VIA DIRITTA O SQUADRA - GHISA/ACCIAIO C./INOX - PN 16-25-40

FLOAT VALVE DOUBLE BALANCED SEAT - STRAIGHT WAY or RIGHT ANGLE - CAST IRON/CARBON/STAINLESS ST. - 100-150-250 LBS

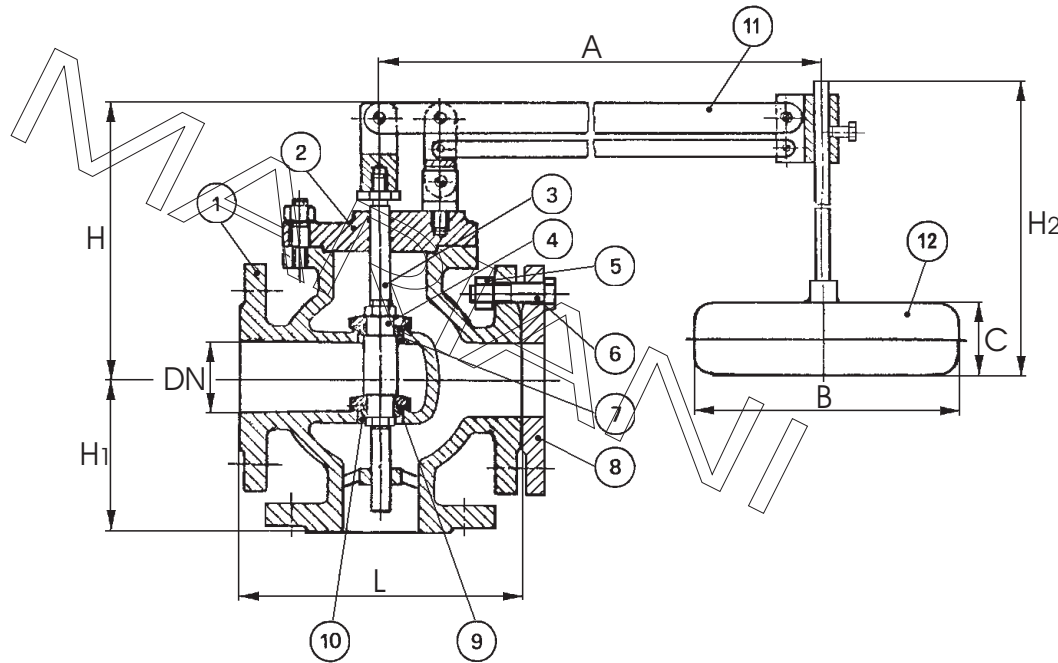

WORKING PRESSURES
W.O.G. NON SHOCK
500 p.s.i.

CONFORM TO: LENGHT DIN 3202 F6

OPTIONAL FEATURES: 10)PTFE DISC

| | DESCRIZIONE | DESCRIPTION | GH (Cast Iron) | A (Carbon Steel) | INOX (StainlessSteel) |
|----|---------------|--------------|------------------|------------------|-----------------------|
| 1 | CORPO | BODY | ASTM A126 B | ASTM A216 WCB | ASTM A351 CF8M |
| 2 | COPERCHIO | COVER | ASTM A126 B | ASTM A216 WCB | ASTM A351 CF8M |
| 3 | ASTA | STEM | ASTM A479 TP.410 | ASTM A479 TP.410 | ASTM A479 TP.316 |
| 4 | OTTURATORE | DISC | ASTM A105 | ASTM A105 | ASTM A479 TP.316 |
| 5 | DADO | NUT | ASTM A194 2H | ASTM A194 2H | ASTM A194 Gr.8 |
| 6 | TIRANTE CORPO | BOLT | ASTM A193 B7 | ASTM A193 B7 | ASTM A193 B8 |
| 7 | SEDE | SEAT | ASTM A479 TP.304 | ASTM A479 TP.304 | ASTM A479 TP.316 |
| 8 | FLANGIA CIECA | BLIND FLANGE | ASTM A105 | ASTM A105 | ASTM A182 F316 |
| 9 | O-RING | O-RING | NBR RUBBER | NBR RUBBER | NBR RUBBER |
| 10 | GUARNIZIONE | GASKET | NEOPRENE | NEOPRENE | NEOPRENE |
| 11 | LEVA | LEVER | ASTM A105 | ASTM A105 | ASTM A182 F316 |
| 12 | GALLEGGIANTE | FLOAT | ASTM A182 F304 | ASTM A182 F304 | ASTM A182 F304 |

FLANGED ENDS: DIN 2501 PN 16 (Cast Iron)

DIN 2501 PN 10-16-25-40 / ANSI-ASME B16.5 - 150 RF (Carbon/Stainless St.)

| SIZE | 1" | 1 1/4" | 1 1/2" | 2" | 2 1/2" | 3" | 4" | 5" | 6" | 8" | 10" | 12" | 14" | 16" | 20" | 24" | 28" |
|------|-----|--------|--------|-----|--------|-----|------|------|------|------|------|------|------|------|------|------|------|
| DN | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 500 | 600 | 700 |
| L | 160 | 160 | 180 | 200 | 240 | 260 | 300 | 350 | 400 | 500 | 600 | 700 | 800 | 900 | 1100 | 1200 | 1200 |
| H | 195 | 195 | 210 | 225 | 250 | 250 | 330 | 340 | 360 | 400 | 420 | 550 | 585 | 600 | 730 | 850 | 970 |
| H1 | 115 | 115 | 120 | 125 | 135 | 155 | 170 | 200 | 200 | 280 | 290 | 350 | 440 | 500 | 550 | 600 | 600 |
| H2 | 860 | 860 | 860 | 860 | 860 | 860 | 860 | 860 | 860 | 1300 | 1300 | 1300 | 1600 | 1600 | 2000 | 2000 | 2000 |
| A | 700 | 700 | 700 | 700 | 700 | 700 | 1050 | 1050 | 1100 | 1300 | 1300 | 1400 | 1400 | 1400 | 1600 | 2150 | 2150 |
| B | 250 | 250 | 300 | 300 | 400 | 400 | 400 | 400 | 400 | 500 | 500 | 500 | 600 | 600 | 700 | 700 | 700 |
| C | 180 | 180 | 200 | 200 | 180 | 180 | 180 | 250 | 250 | 300 | 300 | 400 | 400 | 400 | 530 | 530 | 530 |
| Kg | 12 | 12 | 15 | 24 | 33 | 40 | 62 | 80 | 120 | 184 | 270 | 430 | 535 | 685 | 1050 | 1730 | 1935 |

GH (Cast Iron) EXECUTION=FROM DN 50 (2")