


**VALVOLA A GLOBO – COPERCHIO BULLONATO – VITE ESTERNA –
ASTA SALIENTE – ACCIAIO C./INOX – CLASSE 800**

**GLOBE VALVE – BOLTED BONNET – OUTSIDE SCREW & YOKE –
RISING STEM – CARBON/STAINLESS ST. – CLASS 800**

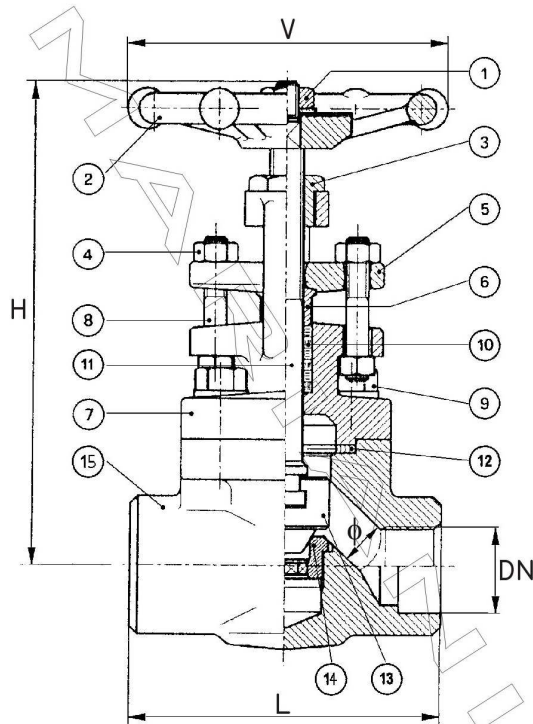

WORKING PRESSURES
W.O.G. NON SHOCK
2000 p.s.i.

**CONFORM TO: TEST API 598 / MSS SP 61 / BS 6755
ANSI B16.34 / BS 5352**

OPTIONAL FEATURES:
1) GLOBE CLASS 1500/ CLASS 2500
2) LOCKING DEVICE

OPTIONAL BODY MATERIAL: 13) ASTM A350 LF2

**OPTIONAL TRIM MATERIAL: 10) MONEL K500
11) FULL STELLITE
12) ASTM A182 F51/F44**

	DESCRIZIONE	DESCRIPTION	A (Carbon Steel)	INOX (Stainless Steel)
1	DADO	NUT	CARBON STEEL	CARBON STEEL
2	VOLANTINO	HANDWHELL	CARBON STEEL	CARBON STEEL
3	MADRE VITE	YOKE SLEEVE	ASTM A182 F316	ASTM A182 F316
4	DADO	NUT	ASTM A194 2H	ASTM A194 Gr. 8
5	FLANGETTA	FLANGE	ASTM A105 N	ASTM A182 F316 L
6	PREMISTOPPA	THRUST WASHER	ASTM A479 TYPE 316	ASTM A479 TYPE 316
7	CAVALLOTTO	YOKE	ASTM A105 N	ASTM A182 F316 L
8	TIRANTI PREMISTOPPA	EYE BOLT	ASTM A193 B7	ASTM A193 B8
9	DADO	NUT	ASTM A194 2H	ASTM A194 Gr. 8
10	BADERNA	STEM PACKING	GRAFOIL	GRAFOIL
11	ASTA	STEM	ASTM A479 TYPE 410	ASTM A479 TYPE 316
12	GUARNIZIONE	GASKET	GRAFOIL + AISI 316	GRAFOIL + AISI 316
13	OTTURATORE	DISC	ASTM A479 TYPE 410	ASTM A479 TYPE 316
14	SEDE	SEAT	ASTM A479 TYPE 410 + Gr.6	ASTM A479 TYPE 316
15	CORPO	BODY	ASTM A105 N	ASTM A182 F316

**THREADING: NPT (ANSI B1.20.1)
SOLDER ENDS: SW (ANSI B16.11) – BW (ANSI B16.25)**

REDUCED BORE	DN	1/2"	3/4"	1"	1"1/4	1"1/2	2"
Ø	9	12.5	17.5	22.5	29	35	
L	80	90	110	127	155	170	
H(open)	160	170	200	235	270	290	
V	80	80	100	120	140	170	
Kg	1.8	2	3.3	5.4	7.9	10.8	